

DATA SHEET



FIBER BACKPACK FOR H510


In the hospitality segment today, fiber-based deployments require an Optical Network Terminal (ONT) to connect access points (APs), deployed in hotel room, to fiber media. Most ONTs today don't support active and passive types of fiber SFP modules. In addition, installing an ONT along with an AP leads to wire clutter and other challenges, which can impact room aesthetics.

Ruckus Fiber Backpack is an optional, field installable, Fiber-to-Ethernet Media Converter accessory providing customers a fiber Optical Network Terminal (ONT) backhaul interface for H510 Wall-plate AP, our leading hospitality AP.

Ruckus Fiber Backpack simplifies Wi-Fi deployments for fiber-ready hotels/MDU. The custom designed fiber backpack attaches unnoticeably to the H510. It supports both PON and Active Fiber SFP modules. It also provides power over PoE to the attached H510 AP.

BENEFITS

- Provides fiber backhaul option for the H510 access point (AP)
- Converts the 10/100/1000Mbps ethernet from the AP to fiber via an SFP cage
- Supports both PON and Active Fiber SFP modules
- Provides power supply to AP by converting DC input power to PoE out
- Installs unnoticeably with H510 AP

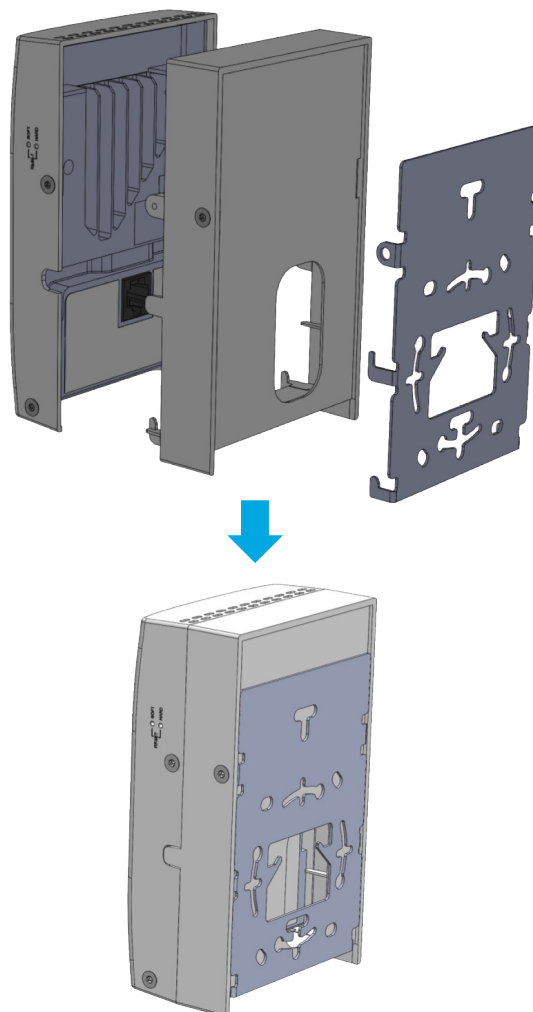

H510 Fiber Backpack Wall Bracket

SPECIFICATIONS

PHYSICAL CHARACTERISTICS	
Power Supply	<ul style="list-style-type: none"> Powered by 48V DC power source
Physical Size	<ul style="list-style-type: none"> 8.95 x 14.67 x 2.45 cm (without cover) 8.95 x 14.67 x 4.18 cm (with cover)
Weight	<ul style="list-style-type: none"> 1 W (max) without SFP module
Ethernet Ports	<ul style="list-style-type: none"> 1 Gbps port
Fiber	<ul style="list-style-type: none"> SFP, 1Gbps, NBASE-X
Environmental Conditions	<ul style="list-style-type: none"> Operating Temperature range: 0 to 40C Humidity: Up to 95% non-condensing
Mounting Options	<ul style="list-style-type: none"> Mounts on the wall with H510 mounted on the other (non-wall) side

POWER	
Max. Power Consumption	<ul style="list-style-type: none"> 1 W (max) without SFP module

MANAGEMENT AND MONITORING CAPABILITIES	
PON	<ul style="list-style-type: none"> IEEE 802.3ah-2005 compliance
1000Base-LX	<ul style="list-style-type: none"> IEEE 802.3ah-2005 compliance TS-1000 compliance

CERTIFICATION SPECIFICATIONS	
Standards Compliance	<ul style="list-style-type: none"> EN 55032 Level 2/3 EMC EN 55024 EMC EN 50121-1 Railway EMC EN 50121-4 Railway Immunity EN 60601-1-2 Medical IEC 60950-1 & IEC 62368-1 Safety IEC 61373 Shock & Vibration EN 50155 Transportation ISTA 2A Transportation
Hazardous Materials	<ul style="list-style-type: none"> RoHS
Recycle Design	<ul style="list-style-type: none"> WEEE

PRODUCT ORDERING INFORMATION

MODEL	DESCRIPTION
P01-0500-0000	Fiber Optic Enclosure, Fiber-to-Ethernet Media Converter. Field Installable Accessory for H510

ACCESSORIES

MODEL	DESCRIPTION
RUCKUS NBASE-X SFP MODULES	
902-0202-0000	EPON Optical Network Terminal, SFP Optic Module, 20km reach, single mode
902-0203-0000 (E1MG-LX-OM)	1000Base-LX SFP optic, SMF, LC connector, Optical Monitoring Capable
E1MG-SX-OM	1000Base-SX SFP optic, MMF, LC connector, Optical Monitoring Capable
POWER SUPPLY	
902-0170-XXYY	Power Supply (48V, 0.63A, 30.24W) – Sold in quantities of 1 or 10
BACKPACK ACCESSORIES	
902-0501-0000	Installation kit with Backpack cover and installation wall bracket for Standalone Backpack use-case
902-0502-0000	Cable cover to be installed on Backpack when 902-1100-XXXX (Ruckus IoT module with cover) is installed on H510

NOTE:

XX specifies the destination region, -US, -EU, -AU, -BR, -CN, -IN, -JP, -KR, -SK, -UK, or -UN.

YY specifies the quantity: 00 = 1 unit, 01 = 10 units